

TIVAR® 88 & TIVAR® 88-2

Key Benefits at a glance:

- Promotes reliable bulk material flow
- High wear, chemical and corrosion resistance
- reduces maintenance and repair costs
- Low coefficient of friction
- No moisture absorption
- No freezing
- Reduction and/or elimination of plugging and arching
- Easy to design to exactly fit the individual application
- UV-resistance prevents from material degradation



Typical application fields:

- Receiving hoppers
- Surge bins
- Dust collection hoppers
- Storage bins
- Vibratory feeders
- Chutes

Lining solutions for the cement industry eliminate sticking, arching and various flow problems

Challenges in the cement industry

Sticky bulk materials such as limestone, gypsum, sand, iron, fly ash, marl, coal, bauxite and other such cohesive materials require a slippery surface to permit bulk materials to move.

Advantages of TIVAR® 88 and TIVAR® 88-2

TIVAR® 88 and TIVAR® 88-2 promote reliable bulk material flow due to their low coefficient of friction. Bulk materials move freely and discharge without hang-up. Plugging, arching and freezing are reduced or even eliminated. Both materials don't absorb any moisture.

The System TIVAR® Engineering team of Mitsubishi Chemical Group (MCG) is made up of specialty engineers with different degrees of experience. Their expertise comprises the design, fabrication and installation of various TIVAR® products into structures like hoppers, bins, chutes, containers, rail cars, ships and other structures that move or store bulk materials.




Customer Benefits

Constant and trouble-free material flow saves time and money and helps to ensure a safe work environment. The remarkable coefficient of friction renders TIVAR® 88 and TIVAR® 88-2 materials with a very low wear rate, which extends the liner's and the hopper's life span, saves costs for maintenance and operational standstills.

Bulk Materials:

- Limestone
- Synthetic gypsum
- Natural gypsum
- Sand
- Lime
- Marl
- Iron
- Fly ash
- Coal

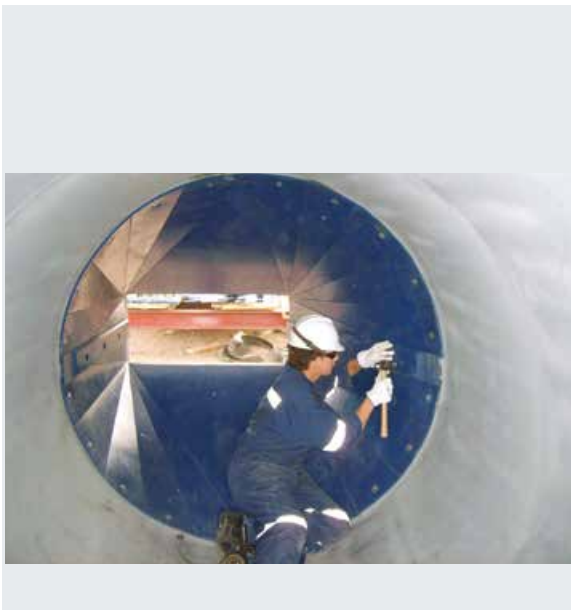

Case Study:

TIVAR® 88-2 Vibratory Feeder Liner

Problem:

Original feeder was plugging causing efficiency issues during production, prompting an immediate need for TIVAR® 88-2 liner.

Solution:

TIVAR® 88-2 liner 15 mm thick for added wear resistances and rapid release technology.

Benefits:

TIVAR® 88-2 liner was produced as one piece panel to eliminate seams, to increase flow, and to provide more consistent feed.

Europe

Mitsubishi Chemical
Advanced Materials NV
Galgenveldstraat 12
8700 Tielt, Belgium
T +32[0] 51 42 35 11
F +32[0] 51 42 33 10
contact@mcam.com

North America

Mitsubishi Chemical
Advanced Materials Inc.
2120 Fairmont Avenue
PO Box 14235 - Reading, PA 19612-4235
T 800 366 0300 | +1 610 320 6600
F 800 366 0301 | +1 610 320 6638
contact@mcam.com

Asia-Pacific

Mitsubishi Chemical
Advanced Materials Asia Pacific Ltd.
Unit 7B, 35/F, Cable TV Tower,
9 Hoi Shing Road, Tsuen Wan, Hong Kong
T +852 2470 26 83
F +852 2478 99 66
contact@mcam.com

mcam.com

All statements, technical information, recommendations, and advice are for informational purposes only and are not intended and should not be construed as a warranty of any type or term of sale. The reader, however, is cautioned that Mitsubishi Chemical Advanced Materials does not guarantee the accuracy or completeness of this information and it is the customer's responsibility to test and assess the suitability of the products of Mitsubishi Chemical Advanced Materials in any given application or for use in a finished device. TIVAR® is a registered trademark of Mitsubishi Chemical Advanced Materials.

Design and content created by Mitsubishi Chemical Advanced Materials and protected by copyright law.
Copyright © 2022 Mitsubishi Chemical Advanced Materials. All rights reserved.

