

SEMICONDUCTOR

Wet process solutions

**Global leader in providing ultrapure
semi-finished rod, sheet, & tube solutions
for every need in the semiconductor industry**



Typical process tools: FEOL clean, BEOL clean, PVD, sputtering, plating tools & wet bench

WET PROCESS MATERIALS	WAFER HANDLING & COMPONENTS	STRUCTURAL & CHAMBER
Proteus® PP		✓
Semitron® PP	✓	✓
Ertalyte® PET-P	✓	✓
Ketron® 1000 PEEK	✓	
Sultron® 1000PMP	✓	✓
Ketron® CA30 PEEK	✓	✓
Techtron® PPS	✓	✓




Wafer handling & component features

Key considerations

- Corrosion resistance
- Flatness
- Strength & wear
- Purity
- Chemical resistance
- Dimensional strength

Typical applications

- Spin discs & chucks
- Wafer motion gears
- Shower heads
- Wafer grabbers
- Pins & screws

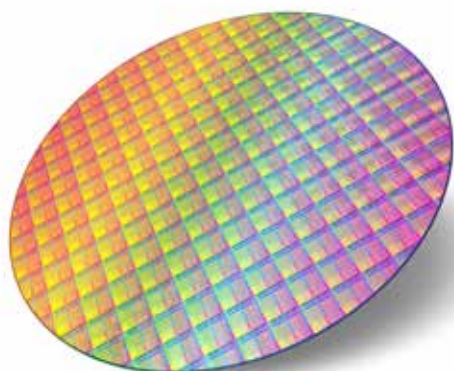

MATERIAL	RELATIVE DIMENSIONAL STABILITY	HDT 264 PSI	APPEARANCE	AVAILABLE SHAPES
Proteus® PP	+	210	dense white	
Semitron® PP	+++	210	white	
Sultron® 1000PMP	++	155	transparent	
Ertalyte® PET-P	++++	240	dense white	
Techtron® PPS	+++++	250	beige	
Ketron® CA30 PEEK	+++++	518	black	
Ketron® 1000 PEEK	+++++	320	tan	

rod sheet tube

Functional chemical compatibility

	SULTRON® 1000PMP	SEMITRON® PP	KETRON® 1000 PEEK	TECHTRON® PPS	KETRON® CA30 PEEK	ERTALYTE® PET-P
Strong acids	+	+	0	0	+	-
Weak acids	+	+	+	+	+	+
Strong base	+	+	+	+	+	+
Weak base	+	+	+	+	+	0
Salts	+	+	+	+	+	+
Halogens	0	0	+	0	+	0
SOLVENTS	Aliphatic hydrocarbon	-	+	+	+	+
	Aromatic hydrocarbon	0	+	+	+	+
	Chlorinated hydrocarbon	-	0	+	+	0
	Ketones	-	+	+	+	+
	Amines	+	+	+	+	+
	Alcohols	+	+	+	+	+
	Esters	-	+	+	+	+
Aldehydes	+	+	+	+	+	+
Phenoles	0	0	+	-	+	-

Tests @ 73°F

- Not Acceptable Service 0 Limited + Service Acceptable Service


Semitron® PP

Semitron® PP is polypropylene plate developed specifically for demanding wet process semiconductor applications that requires a high level of dimensional stability.

Key benefits

- Minimizes center line porosity common with thicker plates (2" & up)
- Delivers ultra-clean plate to minimize risk of surface contaminants
- Lowers overall cost by delivering lower stress plate

Semitron® PP vs. standard PP

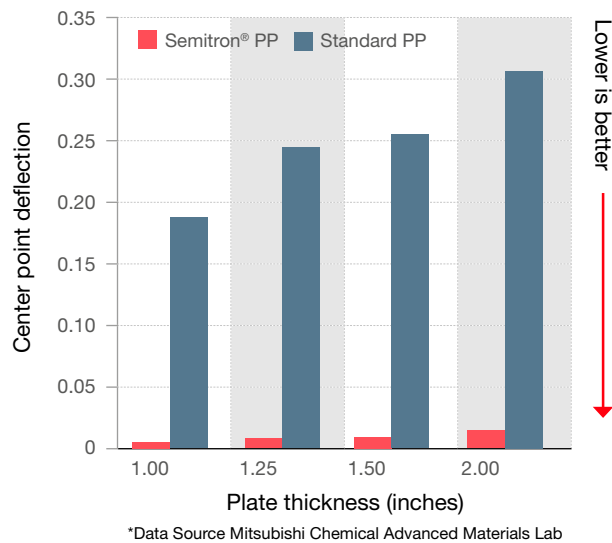

Semitron® PP plate



Minimal center line porosity

- The MCG Advanced Materials Division has developed proprietary processing methods to minimize the high stress & center line porosity that is common with standard polypropylene
- The plates, ranging from 2" to 5" thickness are manufactured to the highest standards for use in the semiconductor wet process industry

Lower internal stress allows for accelerated fabrication cycles through faster speeds & feeds as well as reducing or eliminating the need to anneal.



Standard PP plate



Material comparison guide

		Proteus® PP	Semitron® PP	Ertalyte® PET-P	Sultron® 1000PMP	Techtron® PPS	Ketron® 1000 PEEK
MECHANICAL PROPERTIES							
Specific gravity	D792	0.91	0.92	1.41	0.83	1.35	1.35
Tensile modulus (psi)	D638	190,000	150,000	460,000	240,000	500,000	63,000
Flexural modulus (psi)	D790	195,000	185,000	490,000	195,000	575,000	600,000
Tensile elongation (%)	D638	14	8	20	50	15	40
CLTE (in./in./°F x 10 ⁻⁵)	E-831 (TMA)	-	6.0	3.3	6.5	2.8	2.6
Hardness rockwell	D785	-	R113	M93	R83	M95	M100
Moisture absorption 24hrs @73°F (%)	D570	0.01	0.01	0.07	0.01	0.10	0.10
Izod Notched	D256 Type "A"	1.2	1.0	0.5	0.5	0.6	0.6
THERMAL PROPERTIES							
Heat deflection temperature @264psi (°F)	D648	205	> 300	240	155	250	320
Continuous service temperature	-	180	180	210	300	425	480

Proteus® LF & Semitron® PP sizes available

	THICKNESS (IN.)	PLATE SIZE (MM)		PLATE SIZE (IN.)	
Proteus® LF	0.250	610 x 1220	1220 x 3050	24 x 48	48 x 120
	0.375	610 x 1220	1220 x 3050	24 x 48	48 x 120
	0.500	610 x 1220	1220 x 3050	24 x 48	48 x 120
	0.625	610 x 1220	1220 x 3050	24 x 48	48 x 120
	0.750	610 x 1220	1220 x 3050	24 x 48	48 x 120
	1.000	610 x 1220	1220 x 3050	24 x 48	48 x 120
	1.250	610 x 1220	1220 x 3050	24 x 48	48 x 120
	1.500	610 x 1220	1220 x 3050	24 x 48	48 x 120
Semitron® PP	2.000	610 x 1220	1220 x 3050	24 x 48	48 x 120
	2.250	610 x 1220	1220 x 3050	24 x 48	48 x 120
	2.500	610 x 1220	1220 x 3050	24 x 48	48 x 120
	3.000	610 x 1220	1220 x 3050	24 x 48	48 x 120
	4.000	610 x 1220	1220 x 3050	24 x 48	48 x 120
	5.000	610 x 1220	1220 x 3050	24 x 48	48 x 120

Get in touch

North America

Mitsubishi Chemical
Advanced Materials Inc.

2120 Fairmont Avenue
PO Box 14235 — Reading,
PA 19612-4235
Tel: 800 366 0300
+1 610 320 6600

Europe

Mitsubishi Chemical
Advanced Materials NV

Galgenveldstraat 12
8700 Tielt, Belgium
Tel: +32 051 42 35 11

Asia-Pacific

Mitsubishi Chemical
Advanced Materials Asia Pacific Ltd.

Unit 7B, 35/F, Cable TV Tower,
9 Hoi Shing Road,
Tsuen Wan, Hong Kong
Tel: +852 2470 26 83



Belgium | Brazil | China | France | Germany | Hong Kong | Hungary | India | Italy | Japan | Korea | Mexico
Poland | South Africa | Switzerland | The Netherlands | United Kingdom | United States Of America

All statements, technical information, recommendations, and advice are for informational purposes only and are not intended and should not be construed as a warranty of any type or term of sale. The reader, however, is cautioned that Mitsubishi Chemical Advanced Materials does not guarantee the accuracy or completeness of this

information and it is the customer's responsibility to test and assess the suitability of the products of Mitsubishi Chemical Advanced Materials in any given application or for use in a finished device. Ertalyte®, Ketron®, Proteus®, Semitron® and Techtron® are registered trademarks of Mitsubishi Chemical Advanced Materials.

Design and content created by Mitsubishi Chemical Advanced Materials and are protected by copyright law. Copyright © 2022 Mitsubishi Chemical Advanced Materials. All rights reserved.